


LAN9312 Reference Design


Schematic Revision 0.3

ITEM	Page
Title Page	1
LAN9312	2
Ethernet Ports	3

Circuit diagrams utilizing SMSC products are included as a means of illustrating typical semiconductor applications; consequently complete information sufficient for construction purposes is not necessarily given. The information has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies. Furthermore, such information does not convey to the purchaser of the semiconductor devices described any license under the patent rights of SMSC or others. SMSC reserves the right to make changes at any time in order to improve design and supply the best product possible.


			
Title Title Page			
Size C	Engineer R. Walsh	Assembly No. N/A	Rev 0.3
Date: Thursday, January 03, 2008		Sheet 1 of 3	

NOTE:
Place 49.9 ohm pull-ups close to LAN9312. Place 10 ohm CT resistor close to transformer.

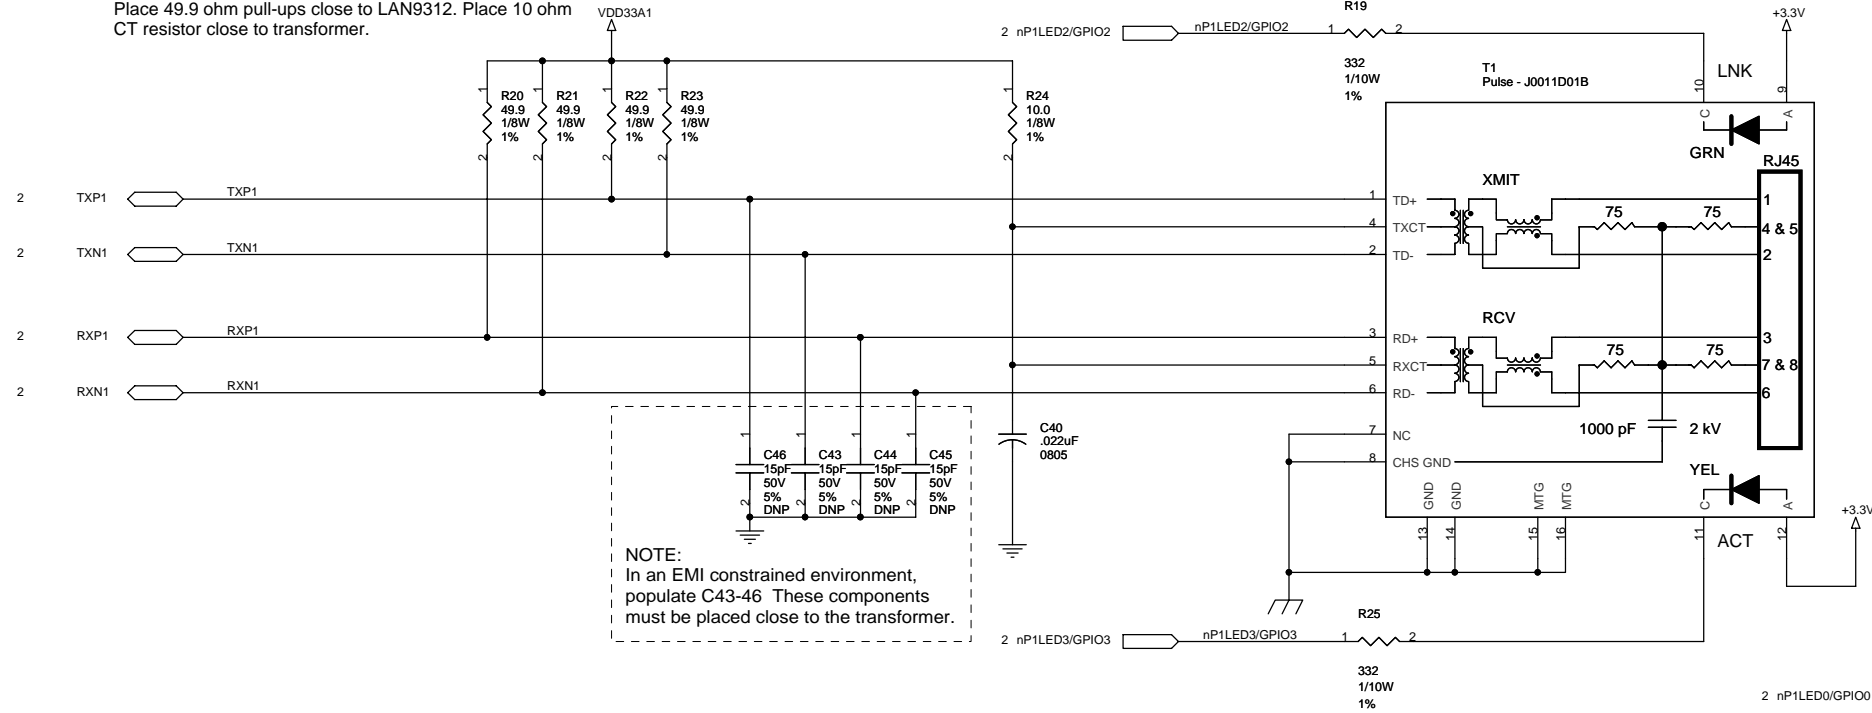

NOTE:
In an EMI constrained environment, populate C43-46. These components must be placed close to the transformer.

NOTE:
Place 49.9 ohm pull-ups close to LAN9312. Place 10 ohm CT resistor close to transformer.

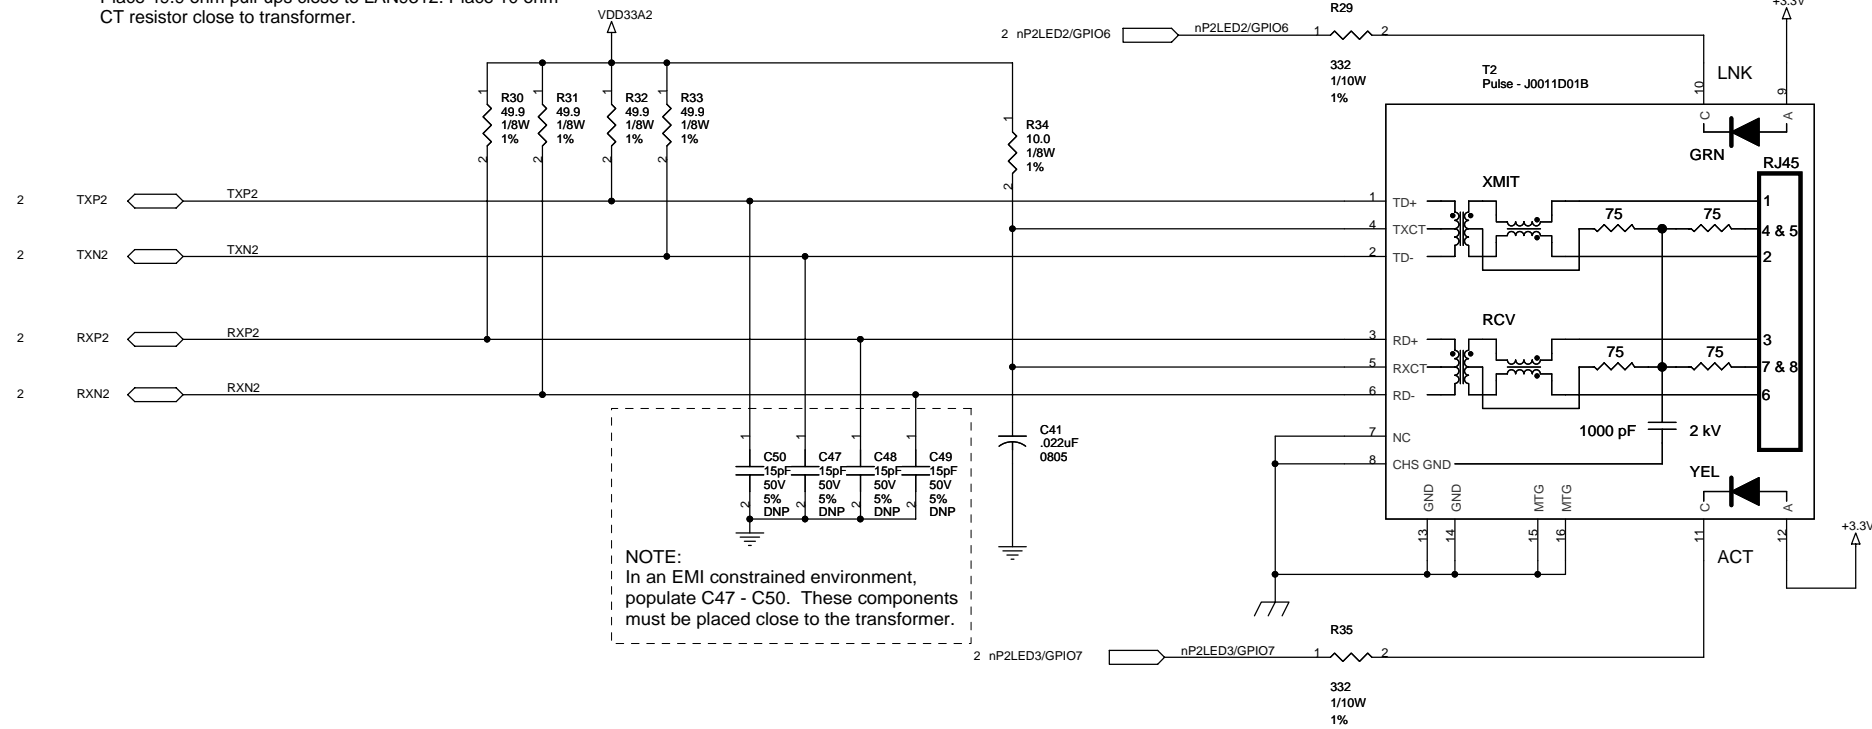

NOTE:
In an EMI constrained environment, populate C47 - C50. These components must be placed close to the transformer.

